

KENDRA



2-seater and 3-seater system for waiting areas

Shell: Multilayer wood thickness 15 mm. Natural or black painted oak finishes.
Version with upholstered seat: MDF inside panel thickness 6 mm, padding in expanded fireproof polyurethane foam density 65 kg/m³, thickness 10 mm

Versions:



Frames:




Sled frame steel Ø 20 mm, thickness 2 mm.
Available finishes: aluminium painted (**AV**), black painted (**AN**) or chromed (**ACC**).



4 legs frame steel Ø 20 mm, thickness 2 mm.
Available finishes: aluminium painted (**AV**), black painted (**AN**) or chromed (**ACC**).

Dimensions:

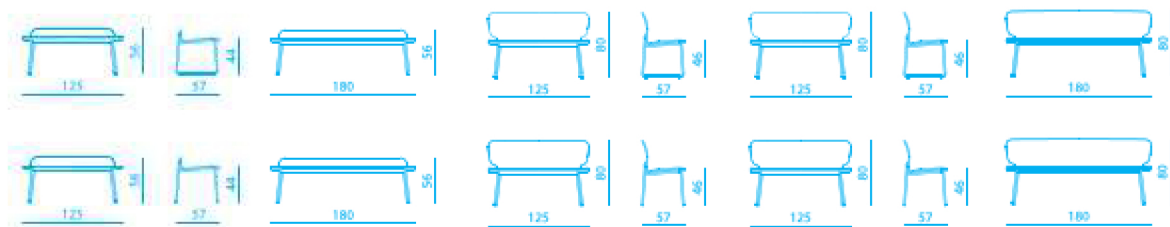

Certificates/ Homologations:



In corso, a richiesta / In progress, by request
Omologazione al fuoco Classe 1IM / Fire resistance Italian homologation